




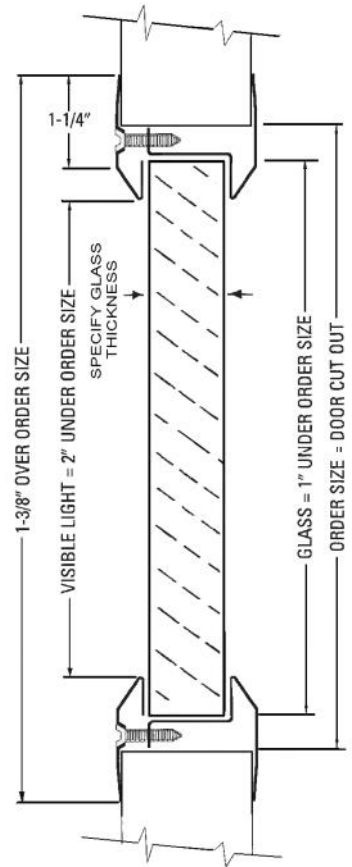

SLIMLINE™ VISION LITE FOR 5/16 - 1" GLASS: VSIG

V3

Low Profile Beveled Vision Lite For Fire Rated Doors. Corridor Side of Door is Free of Fasteners
For Glazing thickness of 5/16" to 1". UL-Listed Models Now Available for 1 3/8" to 2 1/2" Thick Doors.

SPECIFICATIONS:

Material:	20 gauge CRS frame. Min. size 3" x 3", max. 60" x 104". See Fire Rating Below.
Construction:	1-1/4" trim with radius corners, mitered and welded. Continuous glass retainer, countersunk mounting holes in the bevel on non-corridor side.
Door:	<input type="checkbox"/> UL Listing: 1-3/8" to 2-1/2". Specify door thickness: _____ <input type="checkbox"/> WHI Listing: For 1-3/4" door. Door cutout = order size.
Fasteners:	#8 x 1" flathead phillips SMS to match finish.
Powder Coat Finishes:	<input type="checkbox"/> (B) Mineral Bronze (stock color) <input type="checkbox"/> (BK) Black <input type="checkbox"/> (FBK) Flat Black <input type="checkbox"/> (W) White <input type="checkbox"/> (SB) SC Beige <input type="checkbox"/> (SI) Silver <input type="checkbox"/> (R) Red <input type="checkbox"/> (S) Sand <input type="checkbox"/> (G) Gray <input type="checkbox"/> (AB) AMS Beige <input type="checkbox"/> (GH) Gray Hammertone View Color Samples Online
Glass:	_____ " Glass Thickness Will Be Used for this Order. Select Door Above. 5/16"-1" glazing to be ordered separately from Glazing Section of catalog. Use fire rated glazing with Warnock Hersey (WHI) or UL classification markings for fire rated applications. Visible light is 2" under rough opening size. Glass is 1" under order size. Must specify glass thickness above. If glazing is being provided by a supplier other than Air Louvers, coordinate with the supplier to ensure compatibility with IG kits. Fire-Rated Air Louvers Glazing to fit this vision frame: KFRL, KFRFU, CONTRA45, CONTRA 60, ARMRSIELD, LGSIELD.
Fire-Rating, Testing & Listings:	When installed in properly rated and approved door, ratings up to 3 hours can be achieved, depending on the glazing used. See glazing ratings for max exposed area. Tested and Listed for UL 10C and Criteria of UBC 7-2 Positive Pressure.   





OPTIONS AT ADDITIONAL COST:

Finishes & Materials:	<input type="checkbox"/> (S) 20 Gauge Stainless Steel: #4 Finish. <input type="checkbox"/> (G) Galvanized Sheet for Exterior Applications. <input type="checkbox"/> (E) Electro Zinc Plating for Maximum Corrosion Resistance. <input type="checkbox"/> VWLIG —Wood Veneer Finish— View Selection Here
Fasteners:	<input type="checkbox"/> Torx <input type="checkbox"/> Other: _____
Mullions:	Factory welded to vision lite & painted. See Mullions Page in this section to order.
Privacy Screen:	Add the New Privacy Screen to This Vision Lite— See Web Page for Details
Custom:	PAK, smaller or larger sizes, or other options, contact Customer Service for special orders.
Miniblind in Vision Lite:	Blinds are sealed between the two lites of glass. See separate VSLIGMB page in this section

STOCK ITEM - MANY STANDARD SIZES OF VSIG IN STOCK FOR NEXT DAY SHIPMENT FROM SEVERAL WAREHOUSES - LINK

Order Format: VSIG _____ **Example: VSIG 1818B 01**
Option S,G,EG W H Color Glass Thickness

Interpretation of Fire and Building Codes May Vary. Consult with the Local Authority Having Jurisdiction (AHJ) to determine appropriate standards.

  <small>CONSTRUCTION PRODUCTS GROUP</small>	Distributor:	Width: _____ x Height: _____
	Architect:	Quantity: _____ Door Thickness: _____
	Contractor:	Glass Thickness: _____
	Project:	Date: _____ Version: ALPDS1605
800-554-6077 QUOTES@ACTIVARCPG.COM ORDERS@ACTIVARCPG.COM SALES@ACTIVARCPG.COM FAX: 952-835-2218		
VISIT WWW.ACTIVARCPG.COM FOR THE MOST UPDATED PRODUCT INFORMATION BEFORE ORDERING • © ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC 2015 MFG: COMMERCE CA, BLOOMINGTON, MN • WAREHOUSES: LANCASTER PA, ATLANTA GA, CHICAGO IL, SEATTLE WA, FORT MYERS FL, DALLAS TX, FARGO ND, OMAHA NE		