

# PIVOTS AND PIVOT SETS

## ELECTRIFIED INTERMEDIATE OR SIDE JAMB PIVOTS

### MODEL E-M19

#### Application

- Offset Hung
- Electric Pivot for Power Transfer
- Handed




Whenever power transfer pivots are used, the leaves must not be separated

#### Product Description & Features

- Not load-bearing
- Door and jamb portion are factory assembled and cannot be separated
- Always use M19 intermediate pivot to install door
- Specify four, six, eight or twelve wires
- Electrolynx® option available, suffix "QC#" (number of wires)
- 24-gauge wire is rated at 2 amps for low voltage, class II wiring applications
- Available for fire door assemblies (ferrous material) – specify E-FM19
- For 20-minute label, suffix "-20" to the part number
- 3/4" (19mm) offset
- Available 1-1/2" offset
- Door edges must be beveled in 1/8" in 2"
- Furnished with wood and machine screws

#### Technical Information

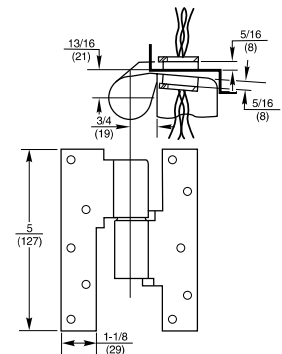

### MODEL E-M19U

#### Application

- Offset Hung
- Electric Pivot for Power Transfer
- Handed
- For Electrified Panic Devices with Large Inrush Current



Whenever power transfer pivots are used, the leaves must not be separated

#### Product Description & Features

- Not load-bearing
- Always use M19 intermediate pivot to install door
- Door and jamb portion are factory assembled and cannot be separated
- Junction boxes are supplied with pivots
- Two each 18 gauge wires. Each wire is rated at 2 amps continuously. UL listed for 24-volt, Class I wiring
- Electrolynx® option not available
- Not available in ferrous material
- 3/4" (19mm) offset
- Door edges must be beveled in 1/8" in 2"
- Furnished with wood and machine screws

#### Technical Information

