



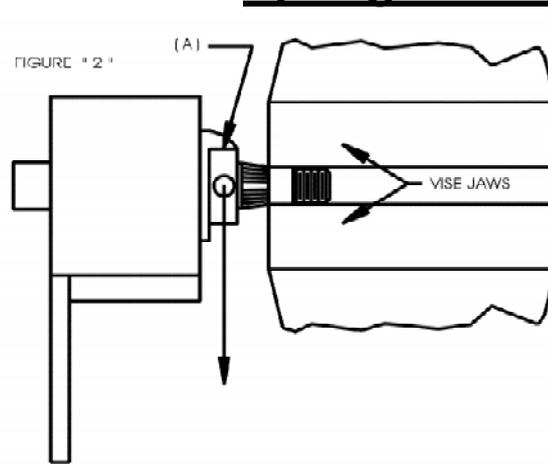

INSTRUCTIONS TO REACTIVATE 7100 AND 7300 SERIES PIVOTS

If a pivot fails to close the door in one or both direction, the unit can be reactivated as follows:

- (1) Remove pin from tension collar.
- (2) Remove the pivot from the door and bracket.
- (3) Viewing the pivot from the threaded end, (see figure "1") and with the mounting bracket toward you, turn the tension collar to the left (counterclockwise) until it comes to a stop. Hold the tension collar in this position while turning the threaded spindle to the right (clockwise) until it comes to a stop.

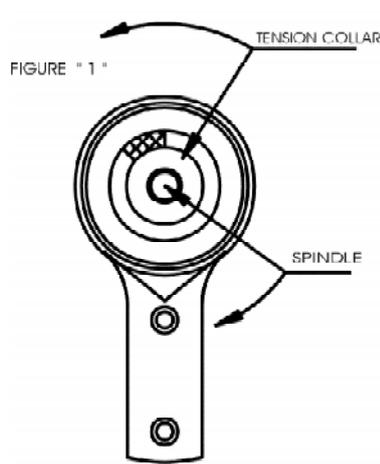

- (4) Place the threaded spindle in a vise, gripping it on the 1/2" Dia. (see figure "2") so the spindle is horizontal and mounting bracket is still toward you.
- (5) Place the tension rod in tension collar hole near the cover plate stop (A) and turn the collar toward you (counterclockwise) until spring tension is felt.

Insert the tension pin into the hole in the tension collar close to the stop (A) on the cover plate. Pin must be inserted fully into the hole with the shoulder of the pin against the tension collar allow the spring tension to rotate the collar and tension pin toward the stop (A) until the pin contacts the stop. Reinstall on door.

7200 SERIES



NON-ADJUSTABLE SPRING TENSION

7211 - BRASS SURFACE PIVOT
BOX CLAMP JAMB BRACKET
8 PIVOTS PER CASE
CASE WEIGHT 26 lbs.
ANSI K63213

7212 - BRASS SURFACE PIVOT
8 PIVOTS PER CASE
CASE WEIGHT 20 lbs.
ANSI K63213



- BRASS
- DOUBLE ACTING
- NON-ADJUSTABLE SPRING TENSION
- NON-HANDED
- MAXIMUM DOOR SIZE
WIDTH - 30"
THICKNESS - 1 7/8"
WEIGHT - 50 lbs.
- FITS DOORS NOT LESS THAN 3/4" THICK
- FLAT JAMB BRACKET- FITS JAMBS NOT LESS THAN 1 1/4" WIDE
- BOX CLAMP JAMB BRACKET FITS 1 1/8" AND 1 1/4" THICK JAMB ONLY

- STANDARD PACKAGING ONE SET PER BOX
- (1) PIVOT WITH BOTTOM JAMB BRACKET
- (1) TOP PIVOT WITH JAMB BRACKET
- (8) No. 12 x 1 1/4" FLAT HEAD WOOD SCREWS
- (2) No. 10 x 1" FLAT HEAD WOOD SCREWS
- (4) THRU-BOLTS FOR BOX CLAMP

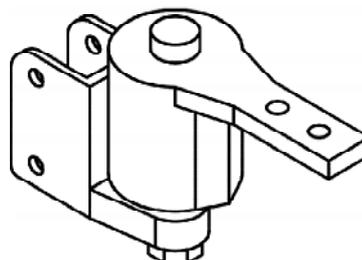

7211

NOTE:
PLEASE SPECIFY
STYLE OR JAMB THICKNESS
WHEN ORDERING 7211



7212

SP-5

“Over 125 Years of Quality”