


Self-Attaching, Beveled Vision Lite with Single Side Fasteners For Fire Rated Doors for 3/16" to 1/4" Glass

**SPECIFICATIONS:**

<b>Material:</b>	20 gauge CRS frame. Min Size 3" x 3", Max 60" x 104". See Fire Rating Below.
<b>Construction:</b>	1-1/4" trim, with mitered and welded corners. Continuous glass retainer, counter-sunk mounting holes in the bevel on non-corridor side. 3/8" projection from door.
<b>Door:</b>	For 1-3/4" door. For other sizes, see VLFIG & VLFEZIG. <b>Door cutout = order size.</b>
<b>Fasteners:</b>	#8 x 1" flathead phillips SMS to match finish.
<b>Powder Coat Finishes:</b>	____ (B) Mineral Bronze ____ (G) Gray (stock colors) ____ (BK) Black ____ (FBK) Flat Black ____ (W) White ____ (SB) SC Beige ____ (SI) Silver ____ (R) Red ____ (S) Sand ____ (AB) AMS Beige ____ (GH) Gray Hammertone <a href="#">View Colors Online</a>
<b>Glass:</b>	3/16" - 1/4" glazing to be ordered separately from <b>Glazing Section</b> of catalog. Use fire rated glazing with Warnock Hersey (WHI) or UL classification markings for fire rated applications. Visible light is 2" under rough opening size. <u>Glass is 1" under order size.</u> <b>Fire-Rated Air Louvers Glazing to fit this vision frame: WS, KFRF, PPF.</b>
<b>Fire-Rating, Testing &amp; Listings:</b>	When installed in properly rated and approved door, ratings up to 3 hours can be achieved, depending on the glazing used. See glazing ratings for max exposed area. Tested and Listed for UL 10C and Criteria of UBC 7-2 Positive Pressure.

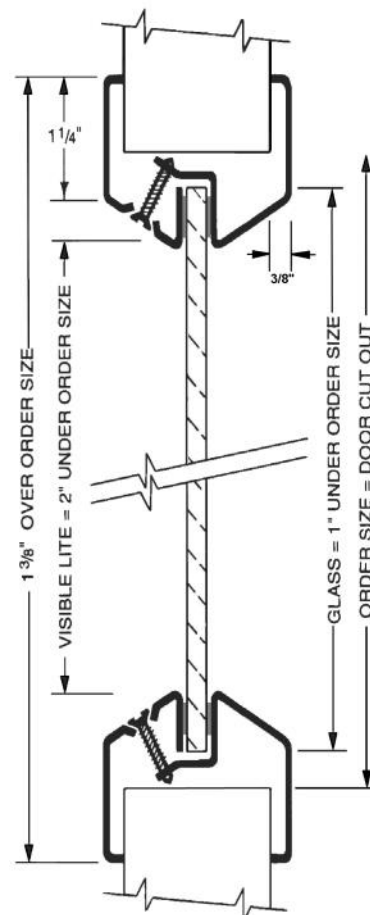

**OPTIONS AT ADDITIONAL COST:**



<b>PAK:</b>	Includes Vision Lite, Glass Sized to Fit, Applied Glazing tape for UL10B Installations, Securely Packaged Individually. <b>See First Page in Vision Lite Catalog.</b>
<b>UBC 7-2 Installation:</b>	____ Additional intumescent tape for <b>Positive Pressure UL10C</b> 20 minute combustible core wood doors installation. See detailed installation instructions.
<b>Finishes &amp; Materials:</b>	____ (S) 20 Gauge Stainless Steel: #4 Finish. ____ (G) Galvanized Sheet for Exterior Applications. ____ (E) Electro Zinc Plating for Maximum Corrosion Resistance.
<b>Fasteners:</b>	____ Torx ____ Other: _____
<b>Mullions:</b>	Factory welded to vision lite & painted. See Mullions Page in this section to order.
<b>Privacy Screen:</b>	Add the New Privacy Screen to This Vision Lite— <a href="#">See Web Page for Details</a>
<b>Custom:</b>	Smaller or larger sizes. Leadlined. Contact Customer Service for special orders.

**STOCK ITEM - MANY STANDARD SIZES OF VLFEZ IN STOCK FOR NEXT DAY SHIPMENT FROM ALL WAREHOUSES - LINK**

Order Format: VLFEZ

Option S,G,EG W H Color

Example: VLFEZ 1212AMS

Interpretation of Fire and Building Codes May Vary. Consult with the Local Authority Having Jurisdiction (AHJ) to determine appropriate standards.

 	<b>Distributor:</b> _____	<b>Width:</b> _____ <b>x Height:</b> _____
	<b>Architect:</b> _____	<b>Quantity:</b> _____
	<b>Contractor:</b> _____	<b>Model:</b> _____
	<b>Project:</b> _____	<b>Date:</b> _____ <b>Version:</b> ALPDS1605

800-554-6077 [QUOTES@ACTIVARCPG.COM](mailto:QUOTES@ACTIVARCPG.COM) [ORDERS@ACTIVARCPG.COM](mailto:ORDERS@ACTIVARCPG.COM) [SALES@ACTIVARCPG.COM](mailto:SALES@ACTIVARCPG.COM) FAX: 952-835-2218

VISIT [WWW.ACTIVARCPG.COM](http://WWW.ACTIVARCPG.COM) FOR THE MOST UPDATED PRODUCT INFORMATION BEFORE ORDERING • © ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC 2015

MFG: COMMERCE CA, BLOOMINGTON, MN • WAREHOUSES: LANCASTER PA, ATLANTA GA, CHICAGO IL, SEATTLE WA, FORT MYERS FL, DALLAS TX, FARGO ND, OMAHA NE